

LOW PROFILE SEMI-AUTOMATIC STRETCH WRAPPER

with 20" Quick-Load Film Delivery

Model

77205-LPVM

NT-77205-LPVM



77205-LPVM

Low Profile Semi-Automatic Stretch Wrapper with 20" Quick-Load Film Delivery

Maximum Load Size:

52" x 52" x 80"

Production Capacity:

30 Loads per Hour

Machine Dimensions:

111"L x 60"W x 86"H

Weight Capacity:

5,000 LB.

LOW PROFILE SEMI-AUTOMATIC STRETCH WRAPPER

with 20" Quick-Load Film Delivery

Model

77205-LPVM

Electrical Data:	120 VAC 60 Hertz 20 Amps Conventional Style 3 Prong Power Cord UL Approved Components NEMA 12 Enclosure with Gasketed door
Turntable Size:	60" Round Turntable w/3" Safety Skirt
Turntable Height:	3 5/8"
Turntable Drive:	¾ HP DC Motor (<i>Totally Enclosed Fan Cooled</i>) High Efficient Lubrication Free helical gear box Heavy-Duty #50 Roller Chain and Drive Sprockets Variable Speed 0-15 RPM with Soft Start and Soft Stop 4 Point Cam follower Supports (5,000 lb. capacity each) Synthetic Lube in all Gearboxes (<i>-30 to 120 Degrees</i>) Turntable Indexing Home Alignment
Controls:	4" Full Color Touch Screen 5 Modifiable Programs Manual Operation System from Touch Screen Turntable Variable Speed Dial Dispenser Variable Speed Dial Film Tension Dial (Force to Load) Turntable Jog Emergency Stop Button Photo Eye for Automatic Load Height Sensing On/Pause Button Start/Resume Switch 3 Indicator Lights Power, Ready and Tension Liquid Crystal Display (LCD) Non-Resettable cycle counter
Film Delivery:	Quick-Load Film Dispenser Manually Adjusted Variable Film Stretch (Load Brake) Stretch Level 30% to 150% Force to Load Accepts 12"-20" Rolls of Stretch Film on 3" Core

LOW PROFILE SEMI-AUTOMATIC STRETCH WRAPPER

with 20" Quick-Load Film Delivery

Model

77205-LPVM

Film Carriage:

Variable Speed Carriage 0-20 FPM
1/4 HP 90 Volt DC Motor
#50 Chain Carriage Lift
Dispenser Kill Switch Top/ Bottom
Adjustable Lower limit Switch
Top Over Wrap
Automatic and Manual Belly Wrapping

Tower Construction

Formed All Steel Tower
80" Wrap height using 20" Film
Optional wrap heights available up to 116"
Maintenance Free UHMW Full Tower Slides
Dispenser Kill Switch Top/Bottom

Frame Construction:

All Welded Steel Construction
Heavy-Duty Structural Tube and Plate
Easy Access to all Components
Industrial Powder Coated Paint Finish
Forklift Portable from Front and Rear

Power Required:

115 volts, 50/60 htrz
20 Amp Service

Documentation:

Complete Operators Manual
Illustrated Parts Break down
Complete Electrical Schematics

Warranty:

4-Year Limited Warranty (100% of all Components)
5-Year Structural Warranty

Average Cycle Time:

1 minute 20 seconds wrapping 40" x 48" x 60" pallet with
12 wraps. Load configuration will vary wrap cycle.

Shipping Weight:

1,240 lbs



1-800-441-5090 • 4781 Highway 319 West • Austin, Arkansas 72007

LOW PROFILE SEMI-AUTOMATIC STRETCH WRAPPER

with 20" Quick-Load Film Delivery

Model

77205-LPVM

Full Color 4" HMI Standard on the 77205-LPVM



6 Modifiable Programs each offering settable Bottom, Mid, and Top Wraps each program also has programmable Top of Load Over Wrap.



Menu Includes Intuitive Parts Break Downs with Part Numbers and Trouble Shooting Screens.




LOW PROFILE SEMI-AUTOMATIC STRETCH WRAPPER

with 20" Quick-Load Film Delivery

Model

77205-LPVM

Machine Dimensions

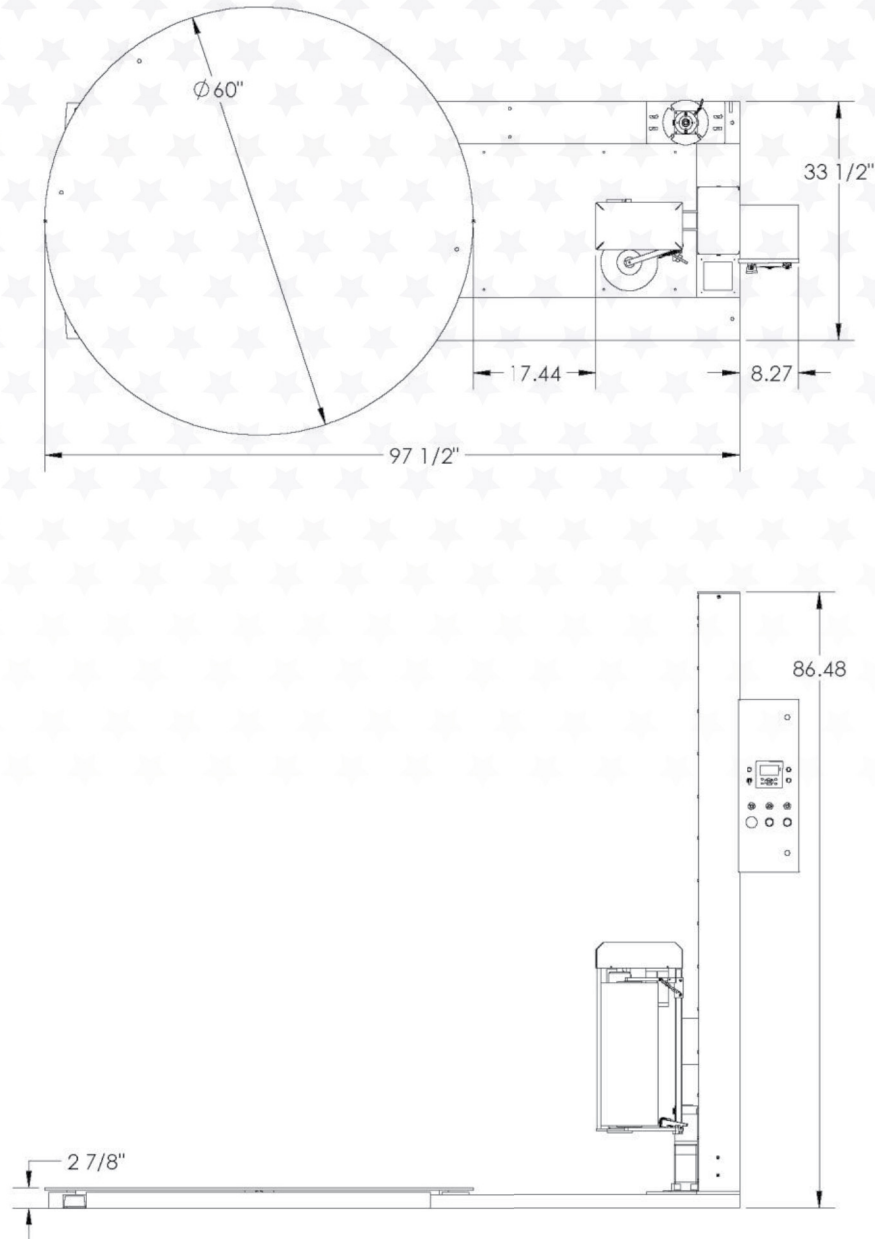

LOW PROFILE SEMI-AUTOMATIC STRETCH WRAPPER

with 20" Quick-Load Film Delivery

Model

77205-LPVM

Terms & Conditions

Machine Price

Valid for 30 days

Freight

F.O.B. point of manufacturer

Delivery

8 weeks from order date

Terms (based on credit approval)

Net 30 days from shipping.

Warranty

The manufacturer warrants its products to be free of defects in material and workmanship for a period of **(4) year with unlimited cycles**, starting from the date of shipment. There is also offers a (10) warranty on all machine structure.