

CONTINUOUS BAND SEALER

Best Selling Band Sealer - Great Entry Level Unit

Model

CBS-880



- Easy to operate with fast warm up
- Durable stainless steel construction
- Feeds right to left

- Optional vertical configuration available
- Recommended for materials such as polyethylene, polypropylene, laminated foil

Our CBS-880 Continuous Band Sealer seals all types of thermoplastic materials and bags with ease! Designed for industries like food, medical, and cosmetics, this powerhouse delivers high-speed sealing at 20-30 6" bags per minute. Want to add a custom touch? Includes an embossing wheel that lets you imprint messages directly on the seal line.

Easy to use with minimal training, the CBS-880 features a fast warm-up time and a solid-state digital temperature controller for consistent seal quality. The adjustable conveyor and motorized rubber belt ensure smooth operation, while knurled pressure rolls provide variable pressure control. An optional vertical kit allows the band sealer to be easily converted to a vertical position in order to seal stand up pouches.

Spare parts kit include PC Board, PTFE belt, drive belts, and typesets, with additional typesets and parts available for purchase.


SPECIFICATIONS			
POWER	110V / 60HZ	BAG HEIGHT (VERTICAL)	6" - 12"
MOTOR / SEALING POWER	50W / 300W*2	TYPESET SIZE	3 X 4 X 9MM
SEALING SPEED	0-630 INCHES/MINUTE	TYPESETS/LINE	15/LINE X 3
SEAL WIDTH	1/2" (10MM)	DIMENSIONS (H)	33" X 15" X 13"
CONVEYOR SIZE	38" X 7"	DIMENSIONS (V)	33" X 15" X 22"
CONVEYOR LOAD	< 22-LBS	WEIGHT	63-LBS

CONTINUOUS BAND SEALER

Best Selling Band Sealer - Great Entry Level Unit

Model

CBS-880

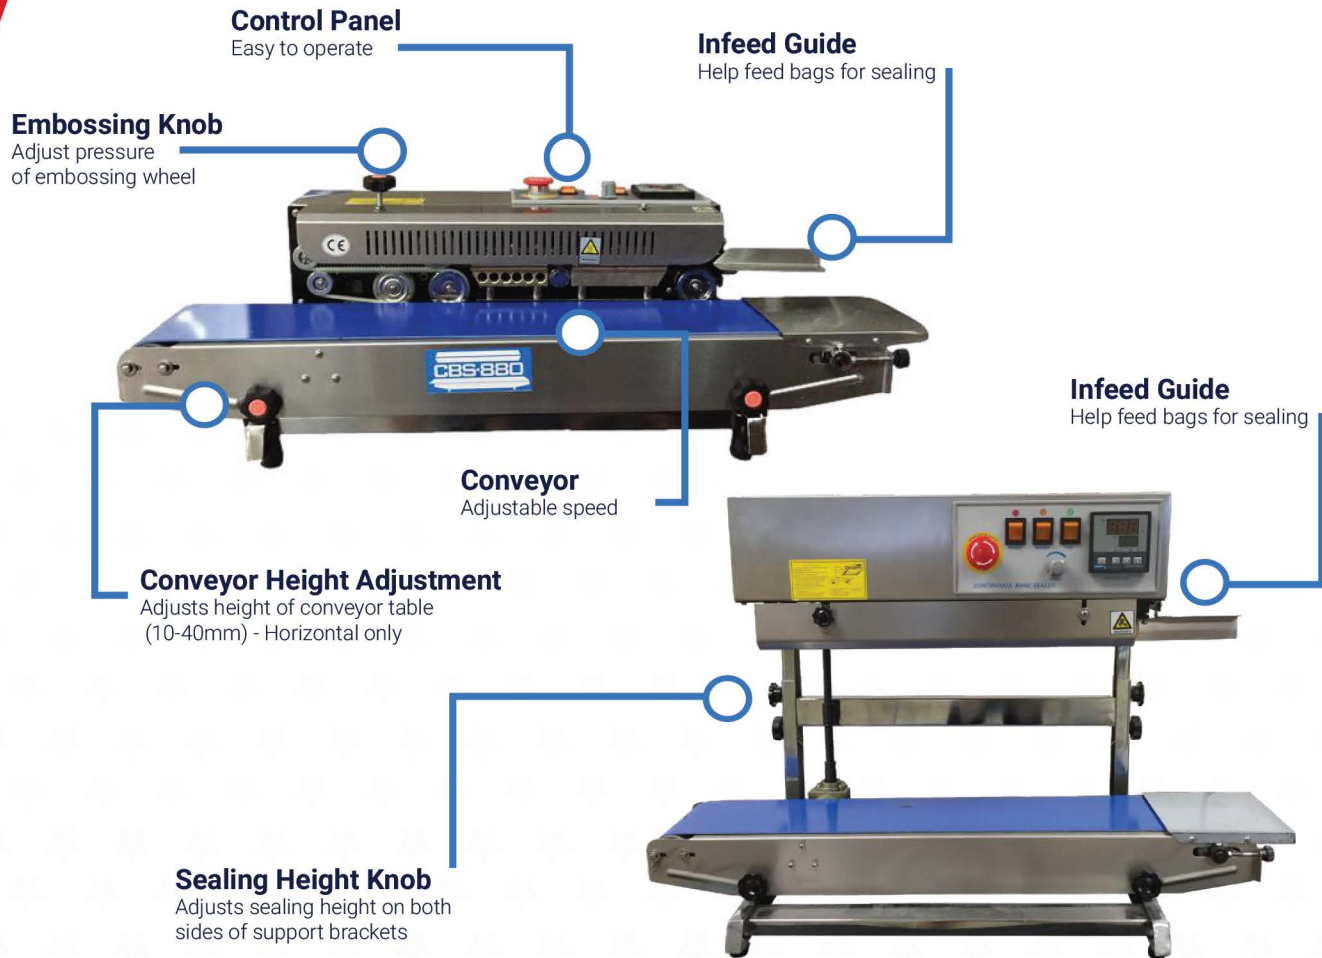

Seal Example



Included Manufacturers' Kit

ADDITIONAL OPTIONS

- Serrated or smooth seal
- Counter
- Printing (HL-M810)
- Left to Right Feed (FR-770)
- Wider Conveyor (12")
- Stainless Steel Stand
- Seal Widths: 15mm / 30mm
- 220V Voltage