

SEMI AUTOMATIC L'SEALER

Heavy duty, rapid cycle, production designed L'Sealer.

Model

TL-3040L



The **Model TL-3040L L'Sealer (30"W x 40"L Seal Area)** is a heavy duty production based unit designed to be run 2 shifts per day if needed. With its heavy duty frame construction, cast aluminum seal head and Nichrome Wire Seal Technology you will get years of use with minimal repairs. This machine is capable of operating at speeds of 5-15 PPM.

STANDARD FEATURES INCLUDE:

- .036 Nichrome Sealing Wire
- Motorized Discharge Conveyor
- Stainless Steel Compensator
- Seal and Magnet Timer
- Seal Head Return Cylinder
- Dual Magnet Hold Down
- Stainless Steel Film Clamps
- Pin Wheel Hole Punch
- Discharge Conveyor Timer
- Locking Casters
- Powder Coated Frame
- Transition Rollers on Discharge Conveyor
- Film Roll Guides
- Film Roll Brake to prevent over-winding
- Heavy Duty Frame Construction

SPECIFICATIONS

MODEL	VOLTS	POWER		WEIGHT NET/SHIPPING	SEAL DIMENSIONS		MAX FILM WIDTH (INCHES)	MACHINE DIMENSIONS		
		PHASE	AMPS		L	W		L	W	H
PP-3040W	220	1	30	830/930	30	40	35	101	41	57



**U.S. PACKAGING
& WRAPPING LLC**

1-800-441-5090
4781 Highway 319 West
Austin, Arkansas 72007

SEMI AUTOMATIC L'SEALER

Heavy duty, rapid cycle, production designed L'Sealer.

Model


TL-3040L

The **Model TL-3040L** is a proven workhorse with thousands of machines in the field successfully running since 1993. Our 20 plus years of experience as the industry leader in manufacturing semi and fully automatic L'Sealers will give you the peace of mind knowing you have purchased the best machine available on the market today!

Our mission is to provide our customers with the latest technology and a user friendly machine that is efficient and easy to maintain. The Preferred Pack brand will give you the lowest total cost of ownership available in the market.

We partner with a nationwide network of highly trained packaging distributors in order to better serve our customers. This partnership provides a support structure to ensure a smooth startup, reliable local service and a long term return on your machinery investment.


TL-3040L Dimensions

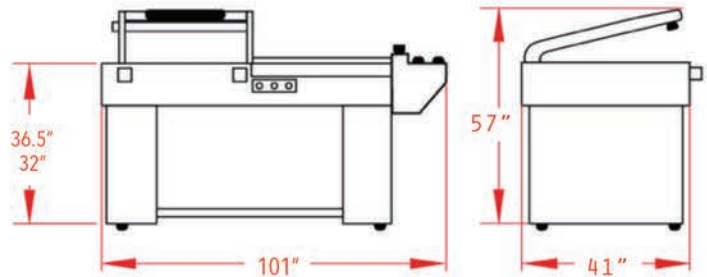

Compensator Assembly
keeps sealing temperature from overheating.



The **.036 Nichrome Sealing Wire** produces a clean, consistent seal every time.

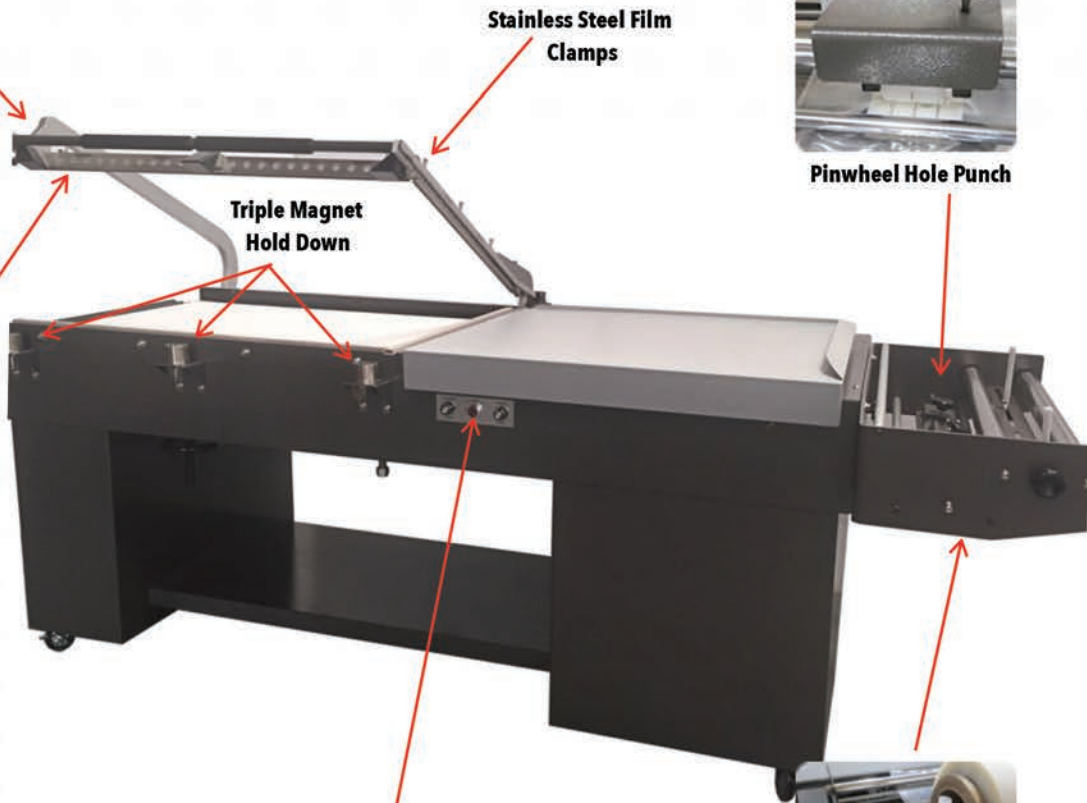

**Conveyor
Timer**

**On/Off
Switch**

**Seal/Magnet
Timer**



**25" Film Cradle
with Roll Brake**